



Care instructions for lacquered floors **VENIFLOOR**

Ongoing cleaning of the floor **VENIFLOOR**

To preserve the beauty of lacquered wooden floors **VENIFLOOR**, should be cleaned regularly. Therefore, when using *A concentrated preparation for the ongoing cleaning of varnished VENIFLOOR floors Venix CLEAN*, we remove light dirt resulting from their daily use. We carry out ongoing cleaning once a week on average, with a higher load on the floors, e.g. in rooms with increased traffic, such as hotels, restaurants, offices, the frequency of cleaning can be increased.

Preparation **Venix CLEAN** can be laid on the floor with a spray mop, flat mop, sponge, cotton cloth, soft fiber cloth or mohair weasel.

Varnished floor **VENIFLOOR**

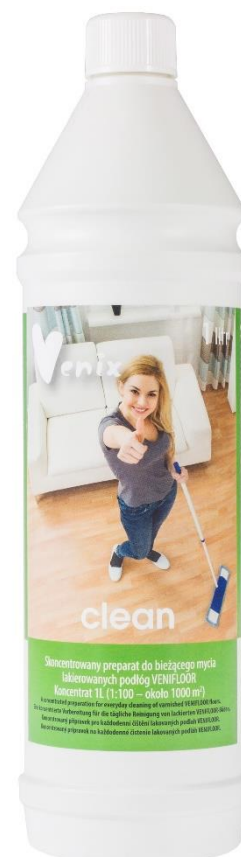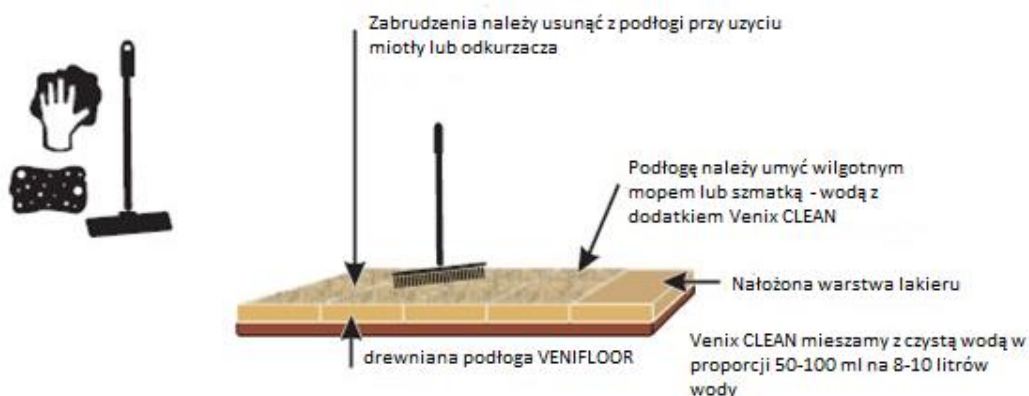

Before applying *A concentrated preparation for the ongoing cleaning of varnished VENIFLOOR floors Venix CLEAN*, the substrate must be thoroughly vacuumed, sand and material scratching the painted surface must be removed.

Venix CLEAN dilute with water in the proportion of 50-100 ml of the preparation for 8-10 liters of water.

The floor should be moistened and then wiped dry. It can be used to remove greasy stains and tough dirt **Venix CLEAN** in a less diluted form.

For better protection of the varnished floor **VENIFLOOR**, Protect the floor with the Concentrate 1-2 times a year against scratching **Venix Cover SATIN** or **Venix Cover MATT**.

The first maintenance of a varnished floor **VENIFLOOR**

The first care / maintenance of Lacquered wooden floors **VENIFLOOR** should be performed before their use, this activity is not required but recommended. The newly made floor should be protected with a protective film - Polymer contained in non-dilutable Concentrates **Venix Cover SATIN** or **Venix Cover MATT**. Concentrates can be laid on the floor with the SPRAY-MOPA with a replaceable microfibre cover or with a clean, highly absorbent and lint-free cotton cloth.

Varnished floor **VENIFLOOR**



In rooms with underfloor heating, the heating should be switched off earlier in order to lower the floor temperature to approx. 20^{about} C.

Then clean the floor thoroughly *A concentrated preparation for the current cleaning of varnished floors VENIFLOOR* **Venix CLEAN** and let it dry completely.

Before using the preparation **Venix Cover SATIN** or **Venix Cover MATT** belongs very good shake the bottle, as the sediment at the bottom of the bottle must be completely dissolved. Pour the concentrate into a bucket and put it on the floor with a mop or clean highly absorbent and lint-free cotton cloth - **ATTENTION !** Do not pour the concentrate directly from the bottle onto the floor !!

The concentrate fluid must be free of foam and bubbles.

The floor can be used after it has hardened, i.e. 12 hours after preserving the floor.

The varnish on heavily loaded surfaces with high traffic intensity can be strengthened by applying the preparation once or twice **Venix Cover SATIN** or **Venix Cover MATT** with a break every 4 hours between layers, keeping the principle that the next layer should be applied perpendicularly to the previous one. The best effect is obtained when the last layer is applied in the direction of the incident light.