

Care Instructions for Oil-waxed Floors **VENIFLOOR**

Ongoing cleaning of wooden floors **VENIFLOOR**

To preserve the beauty of oil-waxed wooden floors **VENIFLOOR**, should be cleaned regularly. Therefore, when using *Concentrate for everyday washing and care* **OSMO Wisch-Fix (8016)**, we remove weak or strong dirt resulting from their everyday use. We perform current cleaning depending on the following class of use of the premises, maintaining the mixing ratio: (cap) - 15 ml **Wisch-Fix (8016)** for 2 liters of water:

CAUTION !!

If the proportion is increased - the amount of concentrate per 2 liters of water - it will be necessary to refill the wax (**3029**) osmo or (**3440**) more often than after **20-25** floor cleaning !!



Usage class 0 - living quarters: living room, kitchen, bedroom, office, dressing room, utility room, corridor: - once a week / two **manual cleaning** holding, preparation **Osmo Wisch-Fix (8016)**, along the grain. - overlapping *Wax cleaner and care* (**3029**) max. after **20-25** cleaning the floor with Osmo Wisch-Fix (8016). - once a year **manual intensive care, Regenerating wax (3440)**.

Service class 1 - rarely used conference rooms, utility and technical rooms: - once a week / two **manual cleaning** holding, preparation **Osmo Wisch-Fix (8016)**, along the grain. - overlapping *Wax cleaner and care* (**3029**) max. after **20-25** cleaning the floor with Osmo Wisch-Fix (8016). - once a year **manual intensive care, Regenerating wax (3440)**.

Usage class 2 - conference rooms: - **2-3** x a week, **machine cleaning** holding, preparation **Osmo Wisch-Fix (8016)**, - overlap *Wax cleaner and care* (**3029**) max. after **20-25** cleaning the floor with Osmo Wisch-Fix (8016). - once per quarter **manual intensive care, Regenerating wax (3440)**.


Usage class 3 - offices, public spaces, corridors and connections: - **2-3** x weekly mechanical maintenance cleaning with preparation **Osmo Wisch-Fix (8016)**, - overlap *Wax cleaner and care* (**3029**) max. after **20-25** cleaning the floor with Osmo Wisch-Fix (8016). - once a quarter manual intensive care with Regenerating Wax (3440).

Usage class 4 - canteens, areas in front of lifts and entrance areas: - daily machine maintenance cleaning, preparation **Osmo Wisch-Fix (8016)**, - application of the wax cleaner and care (**3029**) max. after **20-25** cleaning the floor with Osmo Wisch-Fix (8016). - once a quarter manual intensive care with Regenerating Wax (3440).

CAUTION !!! In order to avoid washing off the wax layer when cleaning the floor, it is essential to adhere to the mixing ratio of the Osmo Wisch-Fix preparations used. The listed measures should always be used integrally. Lack of proper care results in damage, abrasion or destruction of the functional and protective layer. In the case of oil-waxed floors, it is necessary to use only OSMO care and protective agents. Documented use of OSMO products is a condition for maintaining the warranty.

Preparation **Osmo Wisch-Fix (8016)** can be laid on the floor using a flat mop with a cleaning pad.

Oil-waxed floor VENIFLOOR

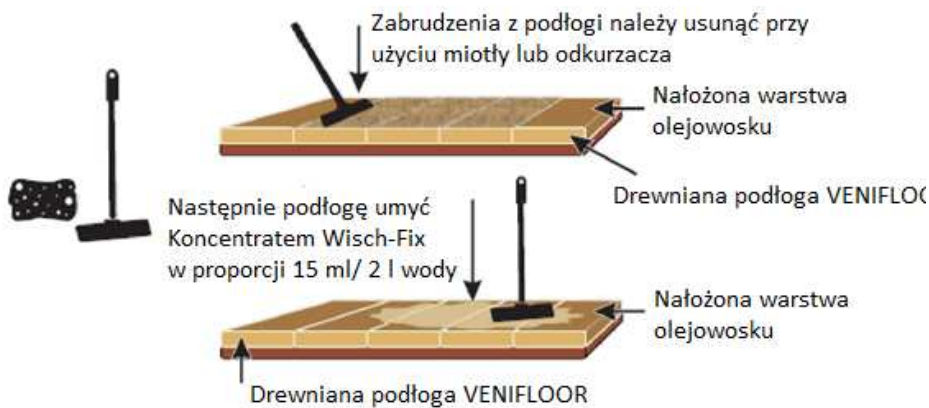

MANUAL CLEANING

Manual cleaning of dirt - Concentrate measure (cap - **15ml** on **2l** water) **Wisch-Fix (8016)** added to water, it allows you to remove all everyday dirt, and thanks to the content of natural oils, it prevents the oil-waxed floor from drying out **VENIFLOOR**. For cleaning oil-waxed wooden floors **VENIFLOOR must not be used!** universal cleaning agents.

To remove debris from normal domestic use of flooring **VENIFLOOR**, add 1 nut (**15 ml**) concentrate **Wisch-Fix (8016)** down **2 liters** clean water, then spray the diluted concentrate onto the floor surface and wipe with a damp (**not wet!**) mop along the grain.

Estimated drying time of the floor from **10** down **15 min.** After drying, the floor is ready for use.

Manual stain cleaning - for very dirty surfaces, the concentrate can be diluted in the following proportion: **1 l** of concentrate **Wisch-Fix (8016)** on **1 l** clean water and spray, then wipe with a damp (**not wet!**) mop along the grain.

Estimated drying time of the floor from **10** down **15 min.** After drying, the floor is ready for use.

- **Manual cleaning of stubborn stains** - with very dirty point surfaces, use a spray preparation *Wax cleaning and care product / - Spray (3029)* and spray on spot stains, then remove the stain with the Osmo FloorXcenter and a white pad or equivalent.

Estimated drying time of the floor from **thirty** down **60 min.** After drying, the floor is ready for use.

MACHINE CLEANING

Machine cleaning: Concentrate **Wisch-Fix (8016)** should be diluted with water in proportion **200 ml** on **10 liters** clean water.

The mixture is applied to a wooden floor **VENIFLOOR** with a sprayer and spread with an Osmo FloorXcenter polishing machine or equivalent with a white pad or replacement. Then immediately pick up the debris and the dissolved dirt with a FloorXcenter machine using the Easy Pad (microfibre wrapped on a white pad).

Estimated drying time of the floor from **10** down **15 min.** After drying, the floor is ready for use. Drying time is extended at low temperatures and / or high air humidity.

CAUTION !! Please note that a dilution ratio of Wisch-Fix (8016) above 2 caps will cause the wax layer to wash out faster. In this case, it is necessary to supplement the wax layer with the preparation - An agent for cleaning and caring for wax Osmo (3029) or Regenerating wax (3440).

INTENSIVE CLEANING

Manual or machine cleaning *Intensive cleaner Osmo (8019)* it is necessary if the floors have stubborn dirt that cannot be removed with current cleaning. We perform this activity on average once every 12 months, with a higher load on the floor, e.g. in a hotel or restaurant, the frequency of cleaning can be increased. After application *Intensive cleaner Osmo (8019)* completely remove detergent residue and dissolved dirt with clean water and a rag.

After thorough intensive cleaning, the floor should be protected with *Regenerative wax (3440)*.


Oil-waxed floor **VENIFLOOR**

Należy wykonać próbę na powierzchni podłogi następnie nanieść mopem *Intensywny środek czyszczący OSMO* rozcieńczony z wodą w proporcji zależnej od stopnia zabrudzenia podłogi.

Po upływie 10 minut należy usunąć rozpuszczony brud i resztę warstw pielęgnacyjnych ściereczką z czystą wodą i pozostawić do całkowitego wyschnięcia powierzchni podłogi

Należona warstwa olejowosku

Drewniana podłoga **VENIFLOOR**



Clean the surface to be treated *Intensive cleaner Osmo (8019)*. The proportion of the mixture of the agent with water is from **1:10** down **1:20**. Pour the cleaning mixture into the hopper of the Osmo Terrassen- und Fußbodenreinigungsmaschine or equivalent.

A wooden floor **VENIFLOOR** clean along the grain (pull the lever on the handle of the deck and floor cleaning machine to spray the cleaning mixture in front of the spinning roller). After approx **10 minutes** wipe the surface with a cotton cloth moistened with clean water, thus removing the dissolved dirt. Then leave the surface to dry, but not for less than 3 hours **4 hours** with good ventilation of the room.

Estimated drying time of the floor from **4** down **5 hours** in temperature **23** about **C / 50%** air humidity. Drying time is extended at low temperatures and / or high air humidity.


Care and maintenance of wooden floor **VENIFLOOR**

Oil-waxed wooden floors **VENIFLOOR** require proper care. Dirt and sand work like sandpaper, they must be removed with a brush, mop or vacuum cleaner, and the protective wax layer is rubbed off with shoes or washed away during cleaning.

Wax Cleaner and Care (3029) perfect for this. It will provide natural oils and waxes that regenerate the protective coating and keep its natural glow. For the restoration of heavily frequented sections of floors in pubs, shops, restaurants, use *Regenerative wax (3440)*. In such facilities, regular regeneration of the coating is important and the frequency of treatments depends on the degree of use of the floor.



Oil-waxed floor **VENIFLOOR**

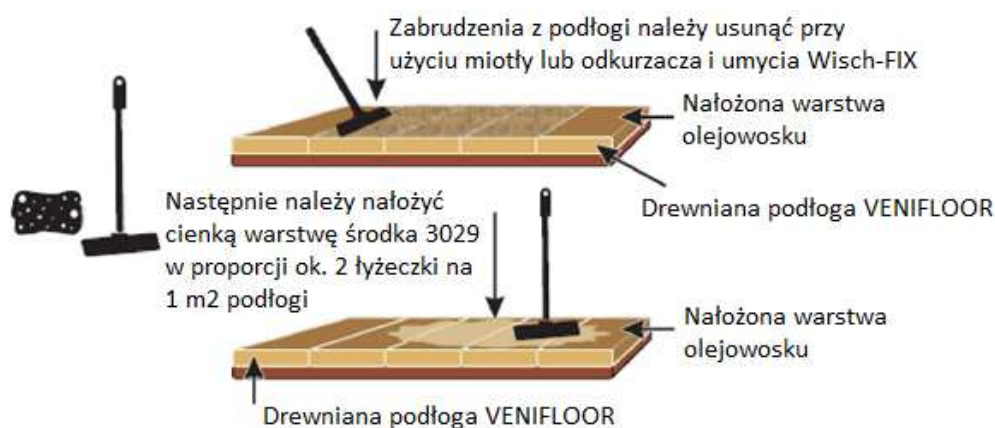

Manual care of dirt and refilling the wax layer - The wood surface must be dry and free from dust. It should be swept or vacuumed and wiped with a damp mop - a mixture of clean water with the addition of concentrate **Wisch-Fix**, then wipe dry.

For stain removal or intensive care (**restoration of the wax layer**) should be applied to the floor, a layer *Wax cleaner and care (3029)* in a proportion of approx **2 teaspoons** on **1 m2** on the floor and mop it along the grain, leaving an even thin layer of oil-wax to dry, and in particularly intensively used areas, we recommend re-applying a layer of oil-wax after drying the first layer.

Manual cleaning of stubborn stains - Particularly stubborn stains should be rubbed *A wax cleaning and care agent (3029)* with a clean cloth or Scotch pad.

Estimated drying time of the floor from **thirty** down **40 minutes** in temperature **23^{about} C / 50%** air humidity. Drying time is extended at low temperatures and / or high air humidity.

CAUTION !! Allow an oil-waxed floor to dry with good ventilation.

Machine care of dirt and restoration of the wax layer - Wax cleaner and care (3029) in a proportion of approx **2 teaspoons** on **1 m²** should be rubbed with a polishing machine with a white pad.

Wax cleaner and care (3029) should be evenly spread over the floor surface and polished. If streaks appear, the white pad must be turned over or replaced with a new one. To obtain a higher gloss on the floor, the surface can be polished after drying with a machine with a white pad.

Intensive care - For the restoration of heavily frequented sections of floors in pubs, shops, restaurants, use *Regenerative wax (3440)*. In such facilities, regular regeneration of the coating is important and the frequency of treatments depends on the degree of use of the floor.



Regenerating wax (3440), is intended for care and regeneration *matted and tarnished coatings on floors VENIFLOOR*. Regular use avoids sanding and renovation work.

The surface of a wooden floor with a maximum wood moisture content of 20% must be clean, dry and frost-free.

Regenerating wax (3440) it is ready to use and must not be diluted. Before use, please mix well.



The surface to be treated must be cleaned *Intensive cleaner Osmo (8019)* and wash with clean water, wiping with a damp mop.

After the floor is dry, it should be applied to its surface *Regenerating wax (3440)* without dilution in an amount of approx. **15-20 ml / m²**, use a spatula or an OSMO roller and spread it thoroughly, then rub the wax evenly with a single-disc sander with a white pad. The wax can be applied to small surfaces with a lint-free cloth.

CAUTION !!

Remember to make a test before applying the wax, because the appearance of the coating depends on the properties of the wood.

Allow to dry with good ventilation.

After approx **3-4 hours** drying in temp. **23**_{about} **C**. you can re-enter the floor. Depending on the temperature and air humidity, the drying time may take longer.

SPECIAL INDICATIONS

To protect the surface of the wooden floor **VENIFLOOR** within the workplace, it is strongly recommended to use soft / rubber seat rollers and protective mats under the seats on rollers. Chairs with fixed legs or on steel tubular frames should be provided with felt pads (screwed or adhesive) thick **4 mm**. Giving up this preventive wood protection can lead to increased wear of the surface, and thus to an increase in maintenance costs.